

Life^x-M

- Complete with high efficiency LED strip lights
- Low consumption
- Compact size
- Easy to install
- Zone 1, 2, 21, 22
- 5 years warranty
- IK09 (IK10 with protective cage)




*Fastening brackets
adjustable*

*Aluminium alloy
extrusion*



Fastening brackets with 2 holes
M8, adjustable 0° to ±30°
“Cortem Group Technology”

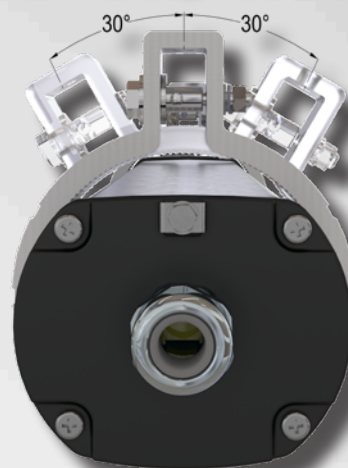

*Metal cable
glands*

LifEx-M series Linear LED lighting fixture in aluminum

LifEx-M lighting fixtures are the first LED native linear fixtures, featuring an innovative design by Cortem Group, created in response to customer requirements.

The product architecture has been carefully designed. The aim is to manage the full product lifecycle optimally as part of a circular economy, and maximise the product's useful life. The result is a compact, lightweight lighting fixture that is easy to install, while also being robust and long lasting.

They feature a high-quality anodised aluminium body and a glass diffuser which is resistant to impact and high temperatures. They have an innovative bracket mechanism, with no fixed interaxis spacing limitations, which makes them easy to install or retrofit and means the lighting fixture can be rotated to $-30^{\circ}/0^{\circ}/+30^{\circ}$. The LifEx range comes in different lengths with a wide array of voltage and power specifications. The range has been optimally designed and certified according to the installation zone and, in addition to passing all tests required by the regulations, it has passed additional mechanical and electrical tests such as vibration testing, IP66, soft start, surge testing and more.

The use of high-power LED strip lights provides a lumen output from 1,000 lm to 15,500 lm, making the range highly efficient and long lasting in terms of its electronics and light engineering.

Sectors of application:



Offshore facilities



Agribusiness facilities



Onshore facilities



Low temp. environments



Chemical and petrochemical facilities



Waste water treatment plants



Naval installations



100% produced by Cortem

CERTIFICATE DATA

Classification:	Group II	Category 2GD/3G	
Installation: EN 60079.14	zone 1, 2, 21, 22 LiEx-ME	zone 2, 21, 22 LiEx-MN	
Marking:	CE 0722 Ex II 2GD - Ex db eb mb IIC T.. Gb - Ex tb IIIC T..°C Db - IP66		LiEx-ME
	CE Ex II 3G - Ex nR IIC T.. Gc CE 0722 Ex II 2D - Ex tb IIIC T..°C Db - IP66		LiEx-MN
Certificate:	ATEX CML 20 ATEX 3018X	LiEx-ME	
	ATEX CML 20 ATEX 3019X ATEX CML 20 ATEX 3018X	LiEx-MN	
	IEC Ex CML 20.0008X	For all IEC Ex, INMETRO, TR CU and UKEX certificate data download the certificate from www.cortemgroup.com	
	UKEX AVAILABLE		
	INMETRO AVAILABLE		
	UL PENDING		
	Standards:	CENELEC EN60079-0: 2018, EN60079-1: 2014, EN60079-7: 2015-18, EN60079-15: 2019, EN60079-18: 2015-17, EN60079-31: 2024, EN60598-2-22 and EUROPEAN DIRECTIVE 2014/34/EU IEC60079-0: 2017, IEC60079-1: 2014, IEC60079-15: 2017, IEC60079-18: 2017, IEC60079-31: 2022, IEC60079-7: 2017 European Directive 2004/108 Electromagnetic compatibility European Directive 2012/19/UE, 2002/96/CE, 2003/108/CE WEEE European Directive 2011/65/UE RoHS	
Temperature class:	For all permitted ambient temperature classes, please see the “Selection tables”		
Ambient temperature:	-60°C for models without a battery -20°C or -60°C* for versions with a battery	For all permitted ambient temperature ranges, please see the “Selection tables”	
Degree of protection:	IP66		



* Emergency lighting fixture with special battery for -60°C

LifEx-M series Linear LED lighting fixture in aluminum



ORIGINAL PRODUCT



For more
information
on electrical
connectors



MECHANICAL FEATURES

Body:	Aluminium alloy extrusion and end caps, resistant to atmospheric and marine corrosion
Clear part:	Tempered glass resistant to shocks, impact and UV rays
Gaskets:	Acid and hydrocarbon resistant silicone
Internal frame:	Aluminium extrusion
Screws:	Stainless steel
Entry points:	Max. 4 entries Ø25.5. Standard version with 2 holes Ø20.5 side (1) complete with 1 NAV20IB and 1 PLG11B. For the other versions, plugs and cable glands are on request
Assembly:	Fastening brackets for M8 holes, adjustable 0° to ±30°

ELECTRICAL FEATURES


Power unit:	Electronic
Rated voltage:	110-277 Vac (for more information, see the Selection tables)
Rated frequency:	50/60 Hz
Connection:	Directly to the terminal board L, N, Pe cross sec. max. 4 mm ² jumpered terminal board suitable for in-out from a single side
Emergency unit:	Electronic inverter 110/277 Vac 50/60 Hz, 110/270 Vdc. Batteries Ni/Mh, 1.8 Ah or 3 Ah, 6V Battery charging monitored by high luminosity green LED
Cabling:	Rigid cables for high temperatures

ACCESSORIES UPON REQUEST / SPECIAL REQUESTS

Pole fastening mechanism
Cage
Coloured LED strip lights
Emergency lighting fixture with battery box to facilitate battery maintenance/replacement operations (example code: LifEx-ME-1230N-AE)
Emergency lighting fixture with battery heater (internal component) for ambient temperatures of -60°C, supplied voltage 230Vac. (example code: LifEx-ME-1230NH)
Connection through wiring (code example: LifEx-ME-1230-AAT)
Dimming of lighting fixtures with DALI standard (Contact our Sales Office for availability)
Driver multirange
Vdc voltage range
Cable gland and plugs
Electrical connectors

LifEx-M series Linear LED lighting fixture in aluminum

The LifEx is a range of tubular LED lighting fixtures that are available in two different configurations for different applications, designated as the **LifEx-ME** and **LifEx-MN**.

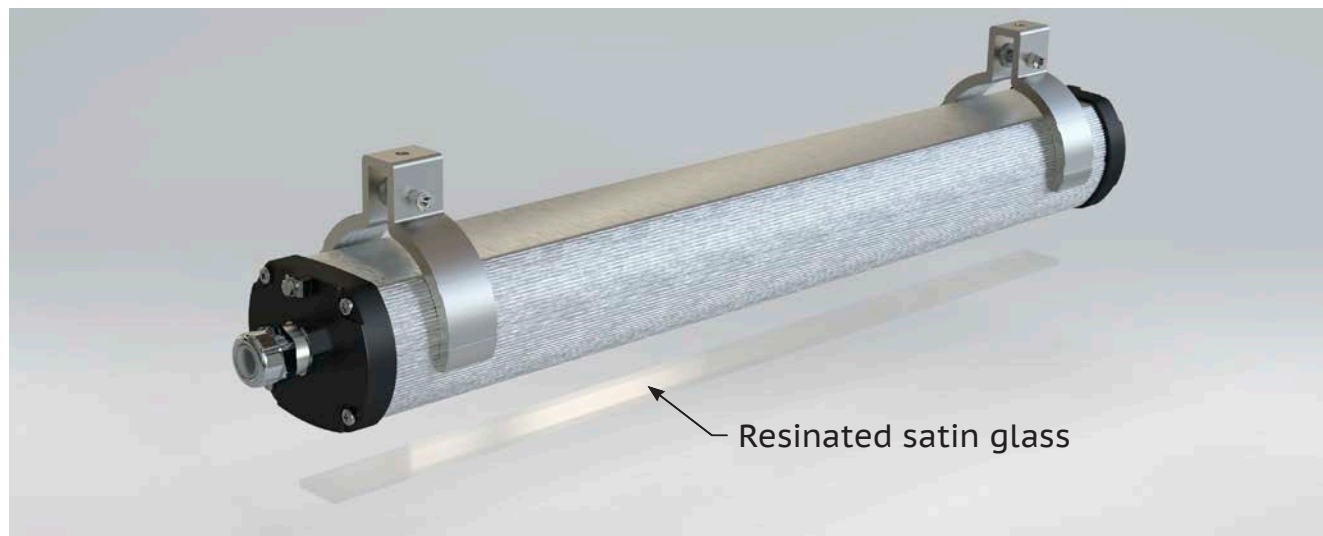

LifEx-ME

The "ME" versions are designed to be used in ATEX areas classified as "Zone 1-2" and "Zone 21-22", that is where the equipment installed must guarantee a high level of protection both in the presence of mixtures of gases, vapours and mists (Zone 1) and in the presence of combustible dusts and particles (Zone 21). LifEx-ME has an EPL (Equipment Protection Level) Gb, Db.


This safety is guaranteed by a combination of protection methods 'Ex db eb mb' for gas and 'Ex tb' for dust.

LifEx-MN

The "MN" versions are designed to be used in ATEX areas classified as "Zone 2" and "Zone 21-22", that is where the equipment installed must guarantee a normal level of protection in the presence of mixtures of gases, vapours and mists (Zone 2), and a high level of protection against dusts and combustible particles (Zone 21). LifEx-MN has an EPL (Equipment Protection Level) Gc, Db.

This safety is guaranteed by the 'Ex nR' protection methods for gases and 'Ex tb' for dusts.

DIMENSIONAL DRAWING

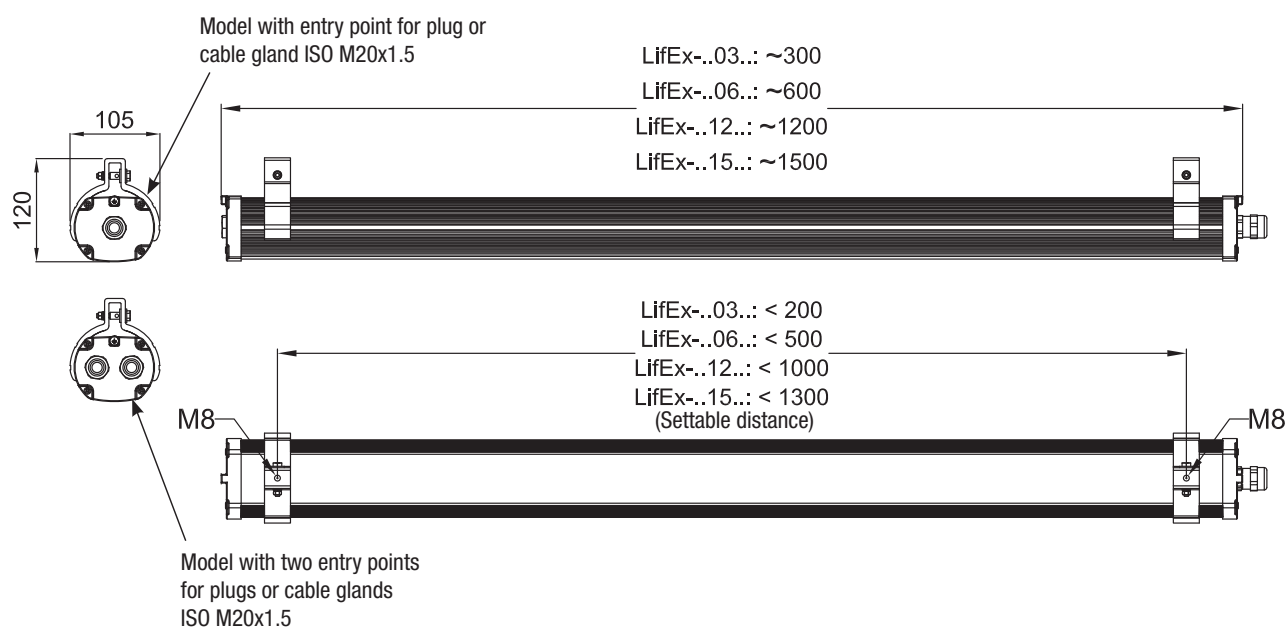

LifEx-M series Linear LED lighting fixture in aluminum

Selection table.

Temperature classes and maximum surface temperatures.

Normal operation											
Code	Real power Watt	Rated power Watt	Supply voltage Volt	Temperature class / Maximum surface temperature			Lumen lm	Light intensity cd	Overall efficiency Lm/W	Weight kg	mm
				+40°C	+50°C	+60°C					
LifEx-ME-0315	13,9	15,0	220-240 Vac	T57°C/T6	T67°C/T6	T77°C/T6	1865	738	134	1,5	541x103x132
LifEx-ME-0330	26,6	30,0	220-240 Vac	T58°C/T6	T68°C/T6	T78°C/T5	3697	1345	140	1,5	541x103x132
LifEx-ME-0615	15,0	15,0	220-240 Vac	T57°C/T6	T67°C/T6	T77°C/T6	2008	777	134	2,5	840x103x132
LifEx-ME-0630	26,2	30,0	110-277 Vac	T80°C/T6	T90°C/T5	T100°C/T4	3677	1345	140	2,5	840x103x132
LifEx-ME-0645	43,5	45,0	110-277 Vac	T83°C/T5	T93°C/T5	-	6200	2248	143	2,5	840x103x132
LifEx-ME-0660	54,5	60,0	110-277 Vac	T95°C/T5	-	-	8011	2924	147	2,5	840x103x132
LifEx-ME-1230	29,0	30,0	110-277 Vac	T60°C/T6	T70°C/T6	T80°C/T6	4112	1451	142	3,5	1398x103x132
LifEx-ME-1260	55,7	60,0	110-277 Vac	T80°C/T6	T90°C/T5	T100°C/T4	8316	2930	149	3,5	1398x103x132
LifEx-ME-1290	79,3	90,0	120-277 Vac	T89°C/T5	T99°C/T4	T109°C/T4	12228	4323	154	3,5	1398x103x132
LifEx-ME-12120	102,6	120,0	220-277 Vac	T91°C/T5	T101°C/T4	-	16029	5662	156	3,4	1398x103x132
LifEx-ME-1590	78,6	90,0	120-277 Vac	T89°C/T5	T99°C/T4	T109°C/T4	11926	4204	152	4,0	1738x103x132

Normal operation + emergency										
Code	Real power Watt	Rated power Watt	Supply voltage Volt	Temperature class / Maximum surface temperature			Lumen lm **	Discharge time in minutes	Weight kg	 mm
				+40°C	+50°C	+60°C				
LifEx-ME-0615N	15,0	15,0	220-240 Vac	T57°C/T6	T67°C/T6	T77°C/T6	980	90	3,0	840x103x132
LifEx-ME-0630N	26,2	30,0	220-240 Vac	T80°C/T6	T90°C/T5	T100°C/T4	980	90	3,0	840x103x132
LifEx-ME-1230N*	29,0	30,0	110-277 Vac	T60°C/T6	T70°C/T6	T80°C/T6	994	180	4,5	1398x103x132
LifEx-ME-1260N*	55,7	60,0	110-277 Vac	T80°C/T6	T90°C/T5	T100°C/T4	994	180	4,5	1398x103x132
LifEx-ME-1590N*	78,6	90,0	120-277 Vac	T89°C/T5	T99°C/T4	T109°C/T4	932	180	5,0	1738x103x132


Emergency operation only								
Code	Supply voltage Volt	Temperature class / Maximum surface temperature			Lumen lm	Discharge time in minutes	Weight kg	 mm
		+40°C	+50°C	+60°C				
LifEx-ME-0615E*	110-277 Vac	T57°C/T6	T67°C/T6	T77°C/T6	1167	90	2,5	840x103x132
LifEx-ME-1230E*	110-277 Vac	T60°C/T6	T70°C/T6	T80°C/T6	1151	90	3.5	1398x103x132

* Models with emergency feature available -60°C

** Lumen in emergency operation.

The lumens in normal operation are the same as the versions without "N".

ORDER CODE LOGIC

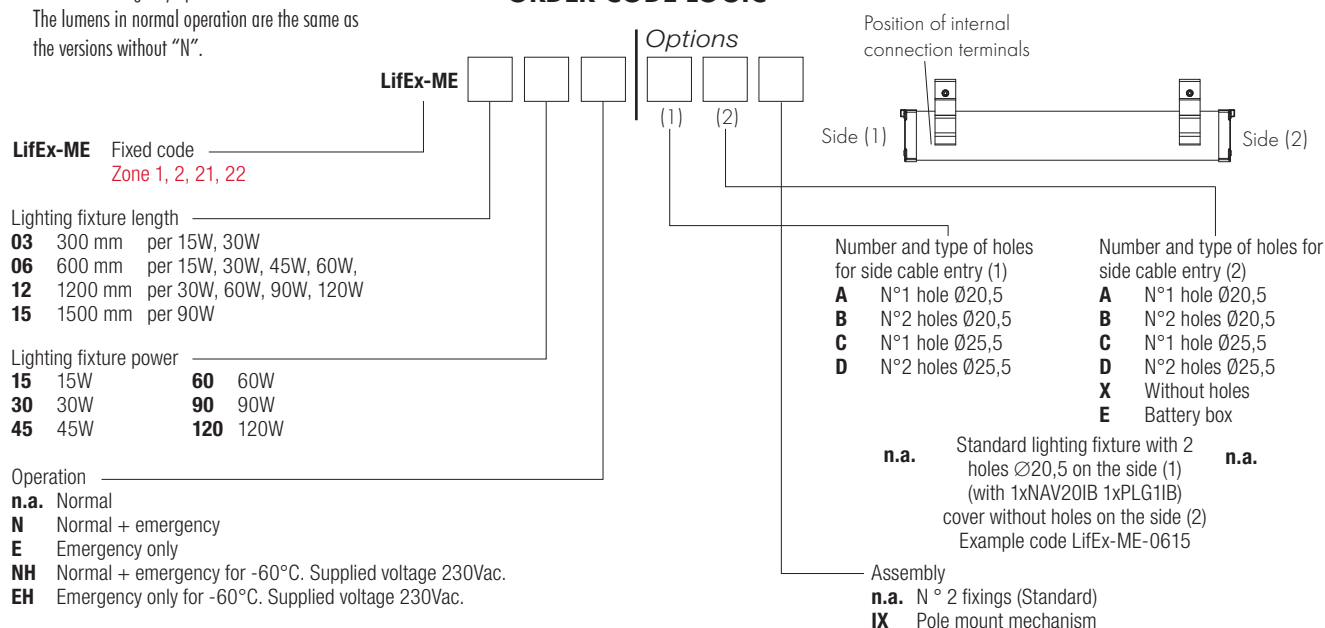





LifEx-M series Linear LED lighting fixture in aluminum

Electrical features	LifEx-ME-03..	LifEx-ME-06..	LifEx-ME-12..	LifEx-ME-15..
Supply voltage:	..15 220-240 Vac	..15 220-240 Vac	..30 110-277 Vac	..90 120-277 Vac
	..30 220-240 Vac	..30 110-277 Vac	..60 110-277 Vac	-
	-	..45 110-277 Vac	..90 120-277 Vac	-
	-	..60 110-277 Vac	..120 220-277 Vac	-
Rated frequency:	50-60 Hz ±5%	50-60 Hz ±5%	50-60 Hz ±5%	50-60 Hz ±5%
Lamp real power consumption:	..15 13,9 W	..15 15,0 W	..30 29,0 W	..90 78,6 W
	..30 26,6 W	..30 26,2 W	..60 55,7 W	-
	-	..45 43,5 W	..90 79,3 W	-
	-	..60 54,5 W	..120 102,6 W	-
Connection:	Direct connection to terminal board L, N, Pe. Section 4mm², suitable for loop-in/loop-out			
Power factor:	..15 0,96	..15 0,97	..30 0,93	..90 0,98
	..30 0,99	..30 0,93	..60 0,96	-
	-	..45 0,93	..90 0,98	-
	-	..60 0,96	..120 0,98	-
Rated current:	..15 70 mA	..15 70 mA	..30 150 mA	..90 350 mA
	..30 150 mA	..30 150 mA	..60 250 mA	-
	-	..45 200 mA	..90 350 mA	-
	-	..60 250 mA	..120 500 mA	-
EMC (Electromagnetic Compatibility): EN 55015, EN 61547, IEC 61000-3-2, IEC 61000-3-3				
THD (Total Harmonic Distortion): <4% 230 Vac, 50 Hz				
Over-voltage protection: (values valid for lamps in normal operation)	..15 2-4 kV	..15 2-4 kV	..30 4 kV	..90 4 kV
	..30 2-4 kV	..30 4 kV	..60 4 kV	-
	-	..45 4 kV	..90 4 kV	-
	-	..60 4 kV	..120 4 kV	-
Driver performance levels: Over-Voltage Protection, Over-Current Protection, Short-Circuit Protection				
Dimmer (on request): 0-10V PWM				
Photometric features				
Multichip LED:		Mid power		
Viewing angle:		120°		
Colour temperature:		5000 K		
CRI:		>80		
Instant Restrike:		YES		
L90:		> 54000 hours		

LifEx-M series Linear LED lighting fixture in aluminum

Electrical features	LifEx-MN-03..	LifEx-MN-06..	LifEx-MN-12..	LifEx-MN-15..
Supply voltage:	..15 220-240 Vac	..15 220-240 Vac	..30 110-277 Vac	..90 120-277 Vac
	..30 220-240 Vac	..30 110-277 Vac	..60 110-277 Vac	-
	-	..45 110-277 Vac	..90 120-277 Vac	-
	-	..60 110-277 Vac	..120 220-277 Vac	-
	-	-	-	-
Rated frequency:	50-60 Hz ±5%	50-60 Hz ±5%	50-60 Hz ±5%	50-60 Hz ±5%
Lamp real power consumption:	..15 13,9 W	..15 15,0 W	..30 29,0 W	..90 78,6 W
	..30 26,6 W	..30 26,2 W	..60 55,7 W	-
	-	..45 43,5 W	..90 79,3 W	-
	-	..60 54,5 W	..120 102,6 W	-
	-	-	-	-
Connection:	Direct connection to terminal board L, N, Pe. Section 4mm ² , suitable for loop-in/loop-out			
Power factor:	..15 0,96	..15 0,97	..30 0,93	..90 0,98
	..30 0,99	..30 0,93	..60 0,96	-
	-	..45 0,93	..90 0,98	-
	-	..60 0,96	..120 0,98	-
	-	-	-	-
Rated current:	..15 70 mA	..15 70 mA	..30 150 mA	..90 350 mA
	..30 150 mA	..30 150 mA	..60 250 mA	-
	-	..45 200 mA	..90 350 mA	-
	-	..60 250 mA	..120 500 mA	-
	-	-	-	-
EMC (Electromagnetic Compatibility):	EN 55015, EN 61547, IEC 61000-3-2, IEC 61000-3-3			
THD (Total Harmonic Distortion):	<4% 230 Vac, 50 Hz			
Over-voltage protection: (values valid for lamps in normal operation)	..15 2-4 kV	..15 2-4 kV	..30 4 kV	..90 4 kV
	..30 2-4 kV	..30 4 kV	..60 4 kV	-
	-	..45 4 kV	..90 4 kV	-
	-	..60 4 kV	..120 4 kV	-
Driver performance levels:	Over-Voltage Protection, Over-Current Protection, Short-Circuit Protection			
Dimmer (on request):	0-10V PWM			
Photometric features				
Multichip LED:	Mid power			
Viewing angle:	120°			
Colour temperature:	5000 K			
CRI:	>80			
Instant Restrike:	YES			
L90:	> 54000 hours			


LifEx-M series Linear LED lighting fixture in aluminum

ILLUSTRATION	DESCRIPTION	MODEL	FEATURES	CODE	KEY
	Rod	Length: 250 mm	Material: stainless steel	BRF8MIN/250	 
	O-type eye bolt		Material: galvanized steel	GOF-8	 
	Bracket type U complete with screws		Material bracket: galvanized steel screws: stainless steel	G-0609	 
	Bracket type V complete with screws		Material bracket: galvanized steel screws: stainless steel	G-0610	 
	Bracket type D complete with screws		Material bracket: galvanized steel screws: stainless steel	G-0611	 
	Bracket type P		Material: galvanized steel	G-0480	 
	Cable gland		For cable gland models and codes, please see www.cortemgroup.com	NAV20IB	 
	Resinated electronic power unit	LifEx-ME-0615		EBM-30L/350	
		LifEx-ME-0330		EBM-30L/700	
		from LifEx-ME-0630 to LifEx-ME-1590		EBM-100L/350	
	Electronic power unit and inverter	LifEx-MN-0315 LifEx-MN-0330 LifEx-MN-0615		LEDDLIFEX10	
		from LifEx-MN-0630 to LifEx-MN-1590		LEDDLIFEX100	
	Electronic power unit and inverter	LifEx-ME-0615N..		EBL4040-2-15N	
		LifEx-ME-0630N..		EBL4040-2-30N	
 	Resinated inverter(LifEx-ME)	LifEx-ME-1230N.. LifEx-ME-1260N.. LifEx-ME-1590N.. LifEx-ME-0615E.. LifEx-ME-1230E..		EIM-30L	
	Not resinated (LifEx-MN)	LifEx-MN-0615N.. LifEx-MN-1630N.. LifEx-MN-1230N.. LifEx-MN-1260N.. LifEx-MN-1590N.. LifEx-MN-0615E.. LifEx-MN-1230E..		INVERTER/LED/NM	

LifEx-M series Linear LED lighting fixture in aluminum

ILLUSTRATION	DESCRIPTION	MODEL	FEATURES	CODE	KEY
	Battery for -60°C	Duration 180 minutes	3 Ah	G-0698	
	Battery unit	LifEx-M...-...E LifEx-ME-06-...N	NiMH, 1.8Ah	G-1096/B	
		LifEx-MN-06...N LifEx-M...-12...N LifEx-M...-15...N	NiMH, 3Ah	G-1097/F	
	Battery box	Duration 180 minutes	3 Ah	G-0707/3AH	
		Duration 90 minutes	1.8 Ah	G-0707/1.8AH	
	Pole bracket Ø1 1/2"	LifEx-M....	Material: galvanized steel	G-0686	 
	Protective cage kit	LifEx-M...-03...	Material: Stainless steel AISI 316L with electropolishing treatment	G01-0675	 
		LifEx-M...-06...		G1-0675	
		LifEx-M...-12...		G2-0675	
		LifEx-M...-15...		G3-0675	
	Electrical connectors	LifEx-M....	For models and codes, visit www.cortemgroup.com	FASTEX...	 

Pole mount mechanism, code G-0686

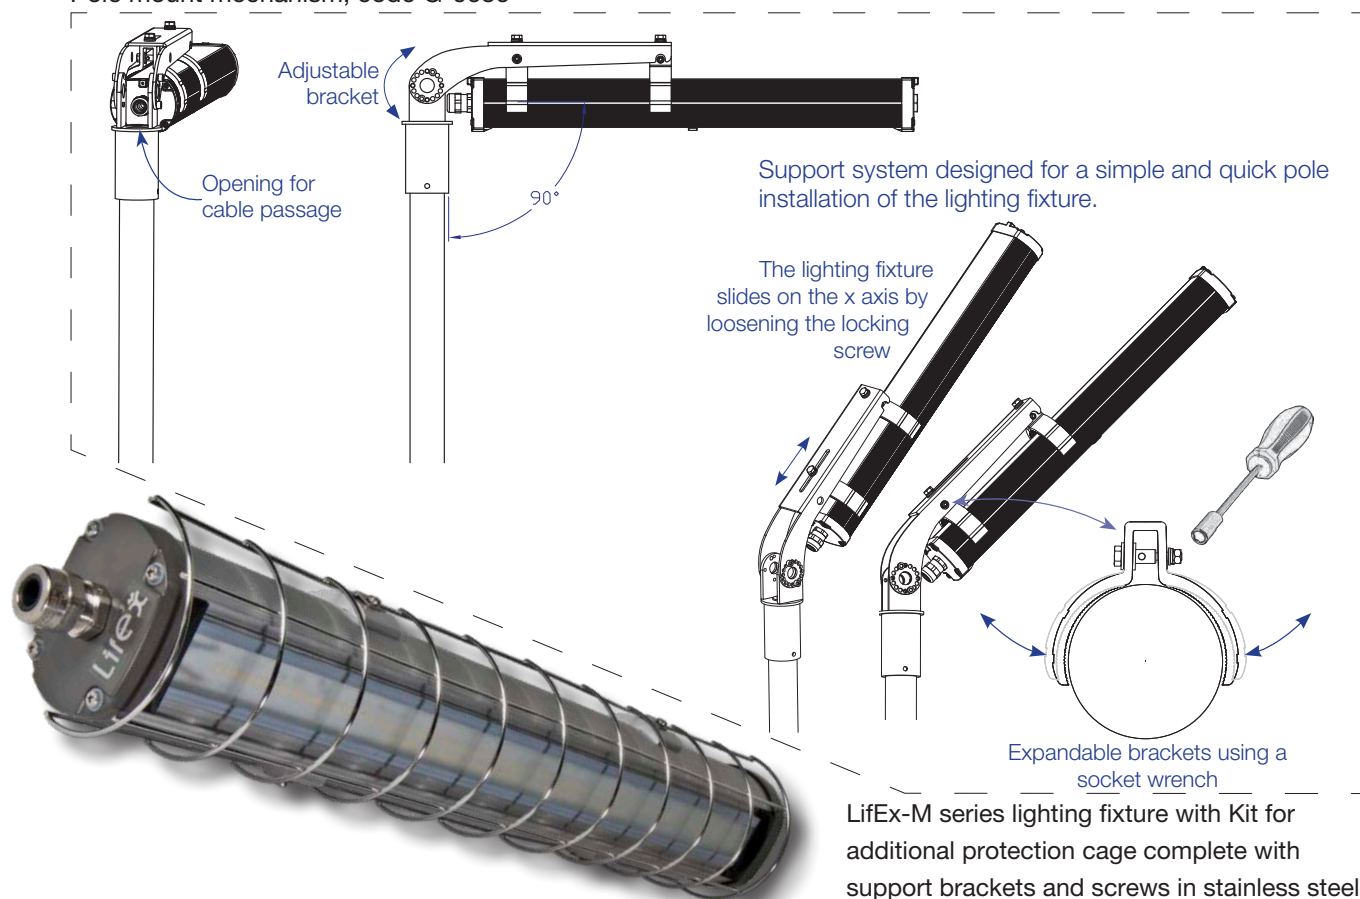


Typical assemblies with installation accessories



Pole mount mechanism with adjustable bracket



Adjustable 0° to ±30°

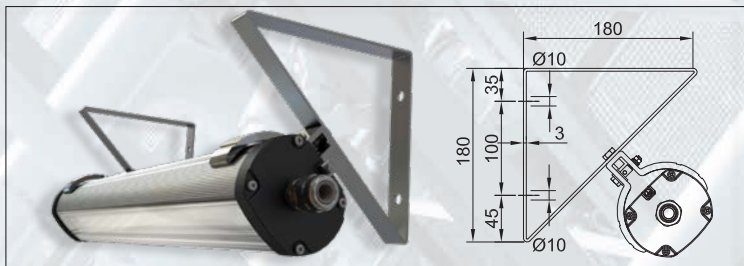

45° corner mount TYPE "D"



Ceiling mount, tall model TYPE "U"



Ceiling mount, tall model TYPE "V"



Suspended mount with eye bolt TYPE "O"



Ceiling mount with 250 mm rod



Mount with metal clamps 1 1/2" TYPE "P"


LifEx-M series Linear LED lighting fixture in aluminum

Emergency lighting fixture with battery box


Version to facilitate battery maintenance/replacement operations.

Versions available with cable entry in SIDE 1 only

Possible codes:
LifEx-M...-AE
LifEx-M...-BE
LifEx-M...-CE
LifEx-M...-DE

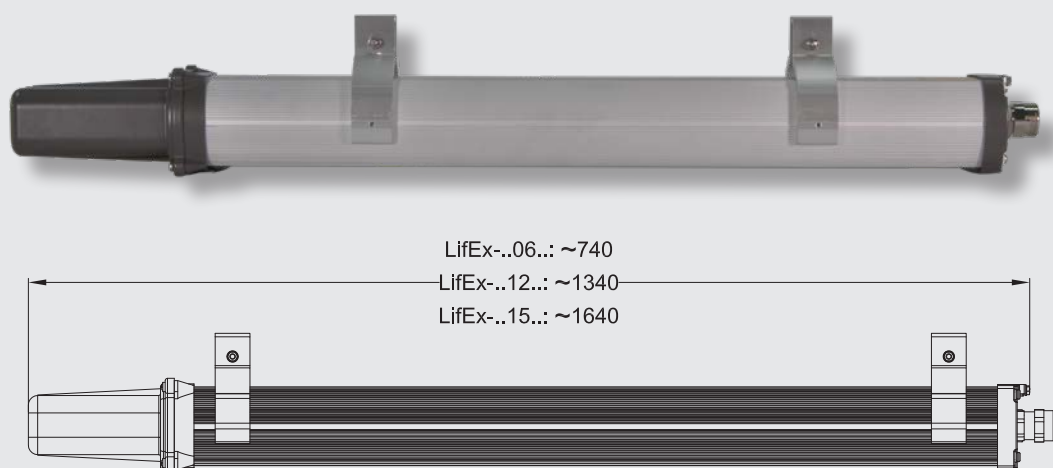

Example of light engineering study performed with LifEx lighting fixtures.

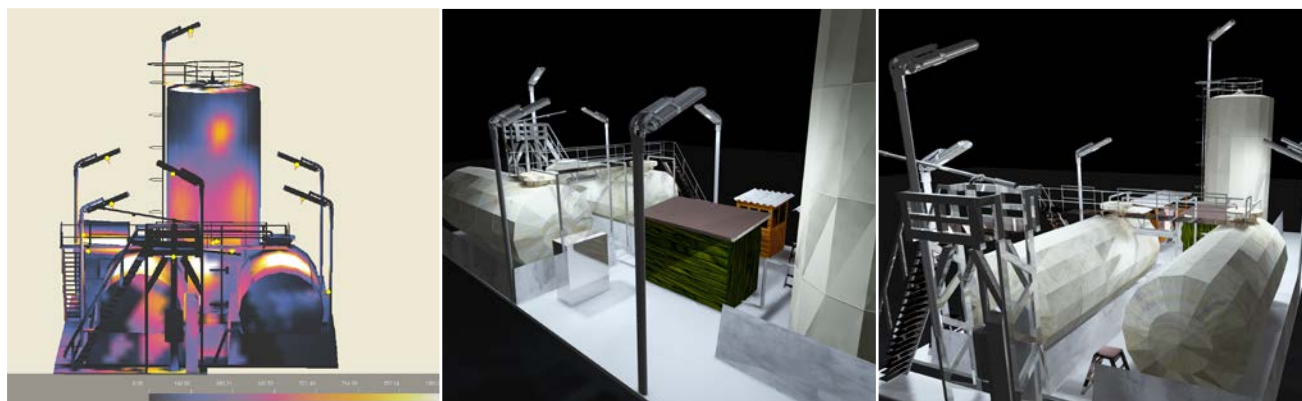

Floor lighting relating to
LifEx-ME-1590 expressed in lux in a
room 6 m x 6 m with fixture at the
centre at a height of **3.5 cm**.

