

Type Examination Certificate CML 21UKEX3073X Issue 0**United Kingdom Conformity Assessment**

- 1 Product or Protective System Intended for use in Potentially Explosive Atmospheres UKSI 2016:1107 (as amended)
- 2 Equipment **LifEx-MN series of linear lighting fixtures**
- 3 Manufacturer **Cortem S.p.A.**
- 4 Address **Via Aquileia 10
34070 Villesse
(GO)
Italy**

- 5 The equipment is specified in the description of this certificate and the documents to which it refers.
- 6 Eurofins E&E CML Limited, Newport Business Park, New Port Road, Ellesmere Port, CH65 4LZ, United Kingdom, certifies that this equipment has been found to comply with the Essential Health and Safety Requirements relating to the design and construction of equipment intended for use in potentially explosive atmospheres given in Schedule 1 of the Regulations.


The examination and test results are recorded in the confidential reports listed in Section 12.

- 7 If an 'X' suffix appears after the certificate number, it indicates that the equipment is subject to specific conditions of use (affecting correct installation or safe use). These are specified in Section 14.
- 8 This Type Examination certificate relates only to the design and construction of the specified equipment. Further requirements of the Regulations apply to the manufacturing process and supply of the product. These are not covered by this certificate.
- 9 Compliance with the Essential Health and Safety Requirements, with the exception of those listed in the confidential report, has been demonstrated through compliance with the following documents:

EN IEC 60079-0:2018

EN IEC 60079-7:2015+A1:2018

- 10 The equipment shall be marked with the following:



Ex ec IIC T... Gc

Ta=* see description





CML 22UKEX3073X
Issue 0

11 Description

LifEx-MN

The LifEx-MN linear LED lighting fixture has an Equipment Protection Level of EPL Gc and Db and utilises types of protection increased safety (ec) and dust protection by enclosure (tb).

It is constructed from an aluminium enclosure, with polycarbonate diffuser and/or with optional glass or polycarbonate lens.

Design Options

Every configuration is available in lengths ranging from 300 mm to 1500 mm, and power ratings up to a maximum of 105W of nominal power.

The LifEx can be used in only normal service, in only emergency service or in normal and emergency service.

The minimum ambient temperature for the range is:

- -60°C for versions without battery
- -60°C for versions with battery heater
- -20°C for versions with battery

The range is available with the following maximum ambient temperatures:

	With glass lens and with/without polycarbonate diffuser	With Polycarbonate lens and with/without polycarbonate diffuser	Without lens polycarbonate diffuser only
LifEx-M...0310	+60°C	+60°C	+60°C
LifEx-M...0315	+60°C	+60°C	+60°C
LifEx-M...0330	+60°C	Configuration not available	Configuration not available
LifEx-M...0615	+60°C	+60°C	+60°C
LifEx-M...0630	+60°C	+50°C	+60°C
LifEx-M...0645	+57°C	+47°C	+60°C
LifEx-M...0660	+47°C	Configuration not available	+58°C
LifEx-M...1230	+60°C	+60°C	+60°C
LifEx-M...1260	+60°C	+50°C	+60°C
LifEx-M...1290	+60°C	+40°C	+60°C
LifEx-M...12120	+54°C	Configuration not available	+60°C
LifEx-M...1590	+60°C	+40°C	+60°C

Table 1: Maximum Ambient Temperatures



**CML 22UKEX3073X
Issue 0**

The following tables provide the Temperature Class for each LifEx type, with the following notes:

- The LifEx-MN with an ambient temperature greater than 50°C is T5 or T4. T6 is not included.
- The Temperature Class in the tables below are not applicable when the ambient temperature is not permitted in the above maximum ambient temperature range
(For example, the LifEx-M...0660 is not permitted with polycarbonate lens, therefore the Temperature Class (EPL Gb) and Maximum Surface Temperature (EPL Db) for this version in tables 2 and 3 are not applicable)

	Temperature Class						
	Based on ambient temperature						
	40°C	45°C	47°C	50°C	54°C	57°C	60°C
LifEx-M...0310	T6	T6	T6	T6	T6	T6	T6
LifEx-M...0315	T6	T6	T6	T6	T6	T6	T6
LifEx-M...0615	T6	T6	T6	T6	T6	T6	T6
LifEx-M...0630	T6	T5	T5	T5	T5	T4	T4
LifEx-M...0645	T5	T5	T5	T5	T4	T4	T4
LifEx-M...0660	T5	T4	T4	T4	T4	T4	T4
LifEx-M...1230	T6	T6	T6	T6	T6	T6	T6
LifEx-M...1260	T6	T5	T5	T5	T5	T4	T4
LifEx-M...1290	T5	T5	T4	T4	T4	T4	T4
LifEx-M...12120	T5	T4	T4	T4	T4	T4	T4
LifEx-M...1590	T5	T5	T4	T4	T4	T4	T4

Table 2: Temperature Class for LifEx types with glass/polycarbonate lens and with polycarbonate diffuser

	Temperature Class (EPL Gb and Gc) and Maximum Surface Temperature (EPL Db)		
	Based on ambient temperature		
	40°C	55°C	60°C
LifEx-MN-0330	T6	T5	T4

Table 3: Temperature Class (EPL Gb and Gc) and Maximum Surface Temperature (EPL Db) for LifEx-M...-0330 types with glass/polycarbonate window and without polycarbonate diffuser



CML 22UKEX3073X
Issue 0

	Temperature Class Based on ambient temperature						
	40°C	45°C	47°C	50°C	54°C	57°C	60°C
LifEx-M...0310	T6	T6	T6	T6	T6	T6	T6
LifEx-M...0315	T6	T6	T6	T6	T6	T6	T6
LifEx-M...0615	T6	T6	T6	T6	T6	T6	T6
LifEx-M...0630	T6	T5	T5	T5	T5	T4	T4
LifEx-M...0645	T6	T5	T5	T5	T4	T4	T4
LifEx-M...0660	T6	T4	T4	T4	T4	T4	T4
LifEx-M...1230	T6	T6	T6	T6	T6	T6	T6
LifEx-M...1260	T6	T5	T5	T5	T5	T4	T4
LifEx-M...1290	T6	T5	T4	T4	T4	T4	T4
LifEx-M...12120	T5	T4	T4	T4	T4	T4	T4
LifEx-M...1590	T6	T5	T4	T4	T4	T4	T4

Table 4: Temperature Class for LifEx types with glass/polycarbonate lens and without polycarbonate diffuser

	Temperature Class Based on ambient temperature						
	40°C	45°C	47°C	50°C	54°C	57°C	60°C
LifEx-M...0310	T6	T6	T6	T6	T6	T6	T6
LifEx-M...0315	T6	T6	T6	T6	T6	T6	T6
LifEx-M...0615	T6	T6	T6	T6	T6	T6	T6
LifEx-M...0630	T6	T6	T6	T6	T6	T5	T5
LifEx-M...0645	T6	T6	T6	T6	T5	T5	T5
LifEx-M...0660	T6	T6	T6	T5	T5	T5	T5
LifEx-M...1230	T6	T6	T6	T6	T6	T6	T6
LifEx-M...1260	T6	T6	T6	T6	T6	T6	T5
LifEx-M...1290	T6	T6	T6	T6	T5	T5	T5
LifEx-M...12120	T6	T6	T6	T6	T5	T5	T5
LifEx-M...1590	T6	T6	T6	T6	T5	T5	T5

Table 5: Temperature Class for LifEx types without glass/polycarbonate lens and with polycarbonate diffuser


The equipment has been separately tested against the requirements of IEC 60529 and it meets IP66. The gaskets on the caps provide the degree of protection.



CML 22UKEX3073X
Issue 0

The equipment uses the following nomenclature:

LifEx- M -

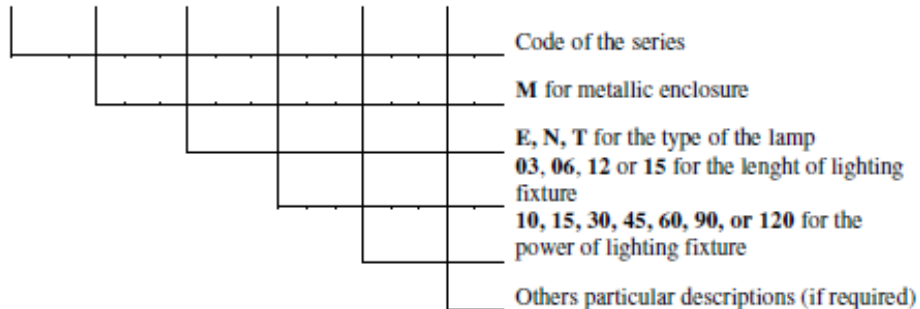

12 Certificate history and evaluation reports

Issue	Date	Associated report	Notes
0	01 Jul 2022	R14875A/00	Prime issue of the UKEX certificate

Note: Drawings that describe the equipment are listed in the Annex.

13 Conditions of Manufacture

The following conditions are required of the manufacturing process for compliance with the certification.

- i. Where the product incorporates certified parts or safety critical components the manufacturer shall ensure that any changes to those parts or components do not affect the compliance of the certified product that is the subject of this certificate.
- ii. The Increased safety lighting fixtures LifEx series is to be designed in accordance with general electrical safety standards.
- iii. Where the removable battery pack is used with phoenix contacts, if used with a T6 version of the equipment, the maximum ambient shall be limited to +40°C.

14 Specific Conditions of Use

The following conditions relate to safe installation and/or use of the equipment.

- i. Cable entries are provided which have less than 5 threads engaged. Care must be taken to ensure the correct gaskets and washers are used with the cable gland to maintain IP66.
- ii. The equipment uses an external part that is constructed from non-metallic materials, and as such care is to be taken to prevent an electro-static charging hazard. See instruction manual for details.
- iii. For versions with glass window of 4mm thickness without cover, the luminaire must be installed in a location with a low risk of mechanical danger.
- iv. The temperature at the entry point may reach up to 75°C. Suitably rated cable glands must be used.

Certificate Annex

Certificate Number CML 22UKEX3073X Issue 0
Equipment LifEx-MN series of linear lighting fixtures
Manufacturer Cortem S.p.A.



The following documents describe the equipment defined in this certificate:

Issue 0

Drawing No	Sheets	Rev	Approved date	Title
A3-7466	1 of 6	1	01 Jul 2022	LifEx-M Luminaires Assembly and External Dimensions
A3-7466	2 of 6	1	01 Jul 2022	LifEx-M Luminaires Detail of sealing and op is protection
A3-7466	3 of 6	1	01 Jul 2022	LifEx-M Luminaires Detail of driver and inverter for LifEx-ME version
A3-7466	4 of 6	1	01 Jul 2022	LifEx-M Luminaires Circuit diagram for LifeEx-ME version
A3-7466	5 of 6	1	01 Jul 2022	LifEx-M Luminaires Circuit diagram LifEx-MN and LifEx-MT version
A3-7466	6 of 6	1	01 Jul 2022	LifEx-M Luminaires Detail of battery pack
A3-7729	1 to 3	0	01 Jul 2022	Battery heater for -60°C /-40°C applications Assembly and External Dimensions
A4-7727	1 to 8	0	01 Jul 2022	Technical Note