



Type Examination Certificate CML 22UKEX3077X Issue 0

United Kingdom Conformity Assessment

- 1 Product or Protective System Intended for use in Potentially Explosive Atmospheres UKSI 2016:1107 (as amended)
- 2 Equipment **LifEx-PN series of linear lighting fixtures**
- 3 Manufacturer **Cortem S.p.A.**
- 4 Address **Via Aquileia 10
34070 Villesse
(GO), Italy**
- 5 The equipment is specified in the description of this certificate and the documents to which it refers.
- 6 Eurofins E&E CML Limited, Newport Business Park, New Port Road, Ellesmere Port, CH65 4LZ, United Kingdom, certifies that this equipment has been found to comply with the Essential Health and Safety Requirements relating to the design and construction of equipment intended for use in potentially explosive atmospheres given in Schedule 1 of the Regulations.

The examination and test results are recorded in the confidential reports listed in Section 12.
- 7 If an 'X' suffix appears after the certificate number, it indicates that the equipment is subject to specific conditions of use (affecting correct installation or safe use). These are specified in Section 14.
- 8 This Type Examination certificate relates only to the design and construction of the specified equipment. Further requirements of the Regulations apply to the manufacturing process and supply of the product. These are not covered by this certificate.
- 9 Compliance with the Essential Health and Safety Requirements, with the exception of those listed in the confidential report, has been demonstrated through compliance with the following documents:

EN IEC 60079-0:2018 EN IEC 60079-7:2015+A1:2018 EN 60079-31:2014

- 10 The equipment shall be marked with the following:



Ex ec IIC T... Gc

Ta= refer to product description





CML 22UKEX3077X
Issue 0

11 Description

The LifEx-P is a range of linear LED lighting fixtures that are available in three different configurations for different applications, designated as the LifEx-PE, LifEx-PT and LifEx-PN.

All versions use a polycarbonate Makrolon extrusion used as enclosure and an internal aluminium extrusion used as an internal frame.

LifEx-PN

The LifEx-PN version has an Equipment Protection Level of EPL Gc and Db and utilises types of protection increased safety (ec) and dust protection by enclosure (tb).

Design Options

Every configuration is available in lengths ranging from 300 mm to 1500 mm, and power ratings up to a maximum of 105W of nominal power.

The LifEx can be used in only normal service, in only emergency service or in normal and emergency service.

The minimum ambient temperature for the range is:

- -60°C for versions without battery
- -20°C for versions with battery (-60°C when Ex mb battery heater is used)

The complete range has an upper ambient of +60°C.

The following tables provide the Temperature Class (EPL Gc) and Maximum Surface Temperature (EPL Db) for each LifEx type, with the following notes:

- The LifEx-PN, when Hadler LED drivers is used with an ambient temperature greater than 50°C is T5 or T4. T6 is not included.

MODEL	Maximum ambient temperature <i>(For Zone 2-21 applications – when Hadler LED driver is used)</i>			
	Ta = +40°C	Ta = +50°C	Ta = +55°C	Ta = +60°C
LifEx-PN-0315..	T6(47°C)	T6(57°C)	T5(62°C)	T5(67°C)
LifEx-PN-0330..	T6(54°C)	T6(64°C)	T5(69°C)	T5(74°C)
LifEx-PN-0615..	T6(47°C)	T6(57°C)	T5(62°C)	T5(67°C)
LifEx-PN-0630..	T6(47°C)	T6(57°C)	T5(62°C)	T5(67°C)
LifEx-PN-0645..	T6(47°C)	T6(57°C)	T5(62°C)	T5(67°C)
LifEx-PN-0660..	T6(54°C)	T6(64°C)	T5(69°C)	T5(74°C)
LifEx-PN-1230..	T6(47°C)	T6(57°C)	T5(62°C)	T5(67°C)
LifEx-PN-1260..	T6(47°C)	T6(57°C)	T5(62°C)	T5(67°C)
LifEx-PN-1290..	T6(47°C)	T6(57°C)	T5(62°C)	T5(67°C)
LifEx-PN-1590..	T6(47°C)	T6(57°C)	T5(62°C)	T5(67°C)

Table 1: Temperature Class (EPL Gc) and Maximum Surface Temperature (EPL Db) for LifEx types when Hadler LED driver is used




CML 22UKEX3077X
Issue 0

The equipment has been separately tested against the requirements of IEC 60529 and it meets IP66. The gaskets on the caps provide the degree of protection.

The equipment uses the following nomenclature:

LifEx-P -

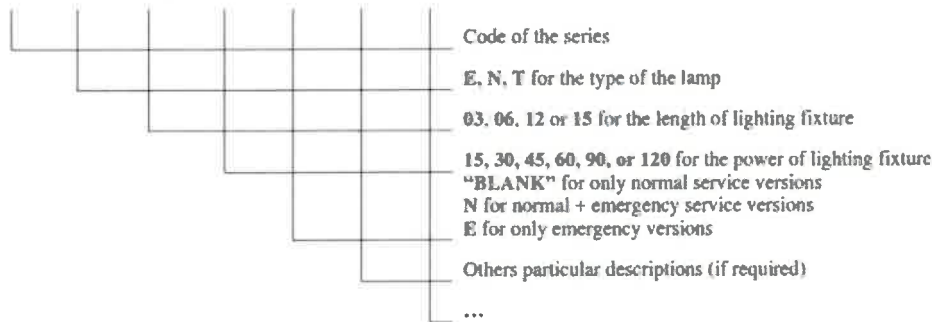

Other suffix can be added on the code for particular configurations

12 Certificate history and evaluation reports

Issue	Date	Associated report	Notes
0	30 Jun 2022	R14827A/00	Issue of Prime Certification

Note: Drawings that describe the equipment are listed in the Annex.

13 Conditions of Manufacture

The following conditions are required of the manufacturing process for compliance with the certification.

- i. Where the product incorporates certified parts or safety critical components the manufacturer shall ensure that any changes to those parts or components do not affect the compliance of the certified product that is the subject of this certificate.
- ii. The LifEx series lighting fixtures are to be designed in accordance with general electrical safety standards.
- iii. The routine dielectric strength test on the LifEx-PE and LifEx-PN luminaries with applied voltage shall be performed at $2U + 1000V$ with a minimum value of 1560V (U = maximum rated voltage of the lamp)
- iv. Where the removable battery pack is used with phoenix contacts, if used with a T6 version of the equipment, the maximum ambient shall be limited to $+40^{\circ}C$.

14 Specific Conditions of Use

The following conditions relate to safe installation and/or use of the equipment.

- i. Cable entries are provided which have less than 5 threads engaged. Care must be taken to ensure the correct gaskets and washers are used with the cable gland to maintain IP66.



CML 22UKEX3077X
Issue 0

- ii. The equipment uses an external part that is constructed from non-metallic materials, and as such care is to be taken to prevent an electro-static charging hazard. See instruction manual for details.
- iii. Impact testing was conducted at 4J only, therefore the equipment must only be installed where there is a low risk of impact, this is in accordance with 60079-0 Clause 26.4.

Certificate Annex

Certificate Number CML 22UKEX3077X
Equipment LifEx-PN series of linear lighting fixtures
Manufacturer Cortem S.p.A.



The following documents describe the equipment defined in this certificate:

Issue 0

Drawing No	Sheets	Rev	Approved date	Title
A3-7714	1 of 6	0	30 Jun 2022	LifEx-PE lighting fixtures Assembly and External Dimensions
A3-7714	2 of 6	0	30 Jun 2022	LifEx-PN & LifEx-PT Lighting fixtures Assembly and External Dimensions
A3-7714	3 of 6	0	30 Jun 2022	Construction, earthing and IP protection details Assembly
A3-7714	4 of 6	0	30 Jun 2022	LifEx-P...N & LifEx-P...E Lighting Fixtures Assembly
A3-7714	5 of 6	0	30 Jun 2022	Battery Box details Assembly
A3-7714	6 of 6	0	30 Jun 2022	Example of accessories Assembly
A4-7713	1 to 7	0	30 Jun 2022	Technical Note

